

P215 PRO-CO 21.5" PORTABLE PROTECTIVE MONITOR

Thinner, Lighter, Brighter



New Protective Case



1920X1080



1000nits



3G-SDI



HDMI 2.0



16 Channel Audio Meter



Tally Indicator

>> NEW PORTABLE PROTECTIVE CASE



Butterfly Lock


Protective Corner

3/8" & 1/4" Screw Thread

>> FEATURES

- Full HD panel, viewing details with confidence
- High bright 1000nit, visible in sunlight
- Portable protective case, easy to handle various tasks
- Intuitive buttons operation, 4 custom function short-cut buttons to improve work efficient
- HDMI Input and Output support 4K@60
- Under HDMI signal the audio meter level can be display max 8 channels; under SDI signal can be display max.16 channels
- HDR monitoring, what you see is what you get
- Custom 3D-LUT, preview film look
- With Waveform, Histogram, Focus Assist, Monochrome etc. functions, help you accurately exposure and focus every shot
- The protective case with multiple 3/8", 1/4" screw thread to install video transmission or other devices
- Built-in dual speakers
- 3-color Tally light, enhance team cooperation

>> FULL RANGE OF AUXILIARY FUNCTIONS

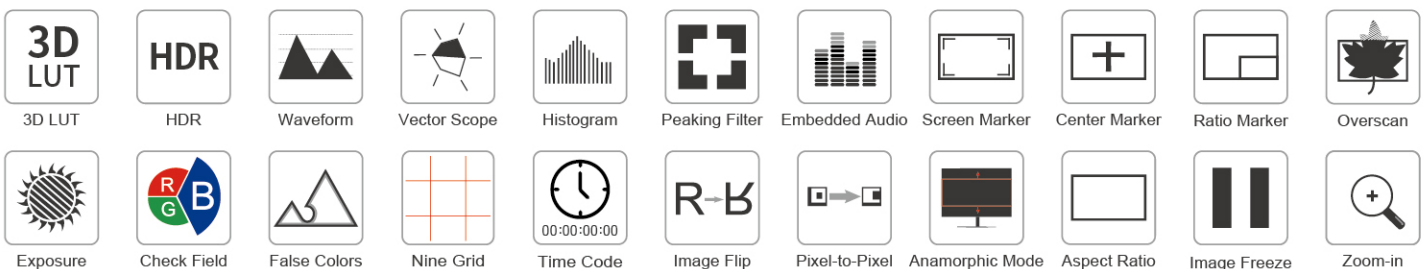

>> MULTIPLE POWER SUPPLY MODES



XLR Connector


DC IN

V-mount Battery Plate





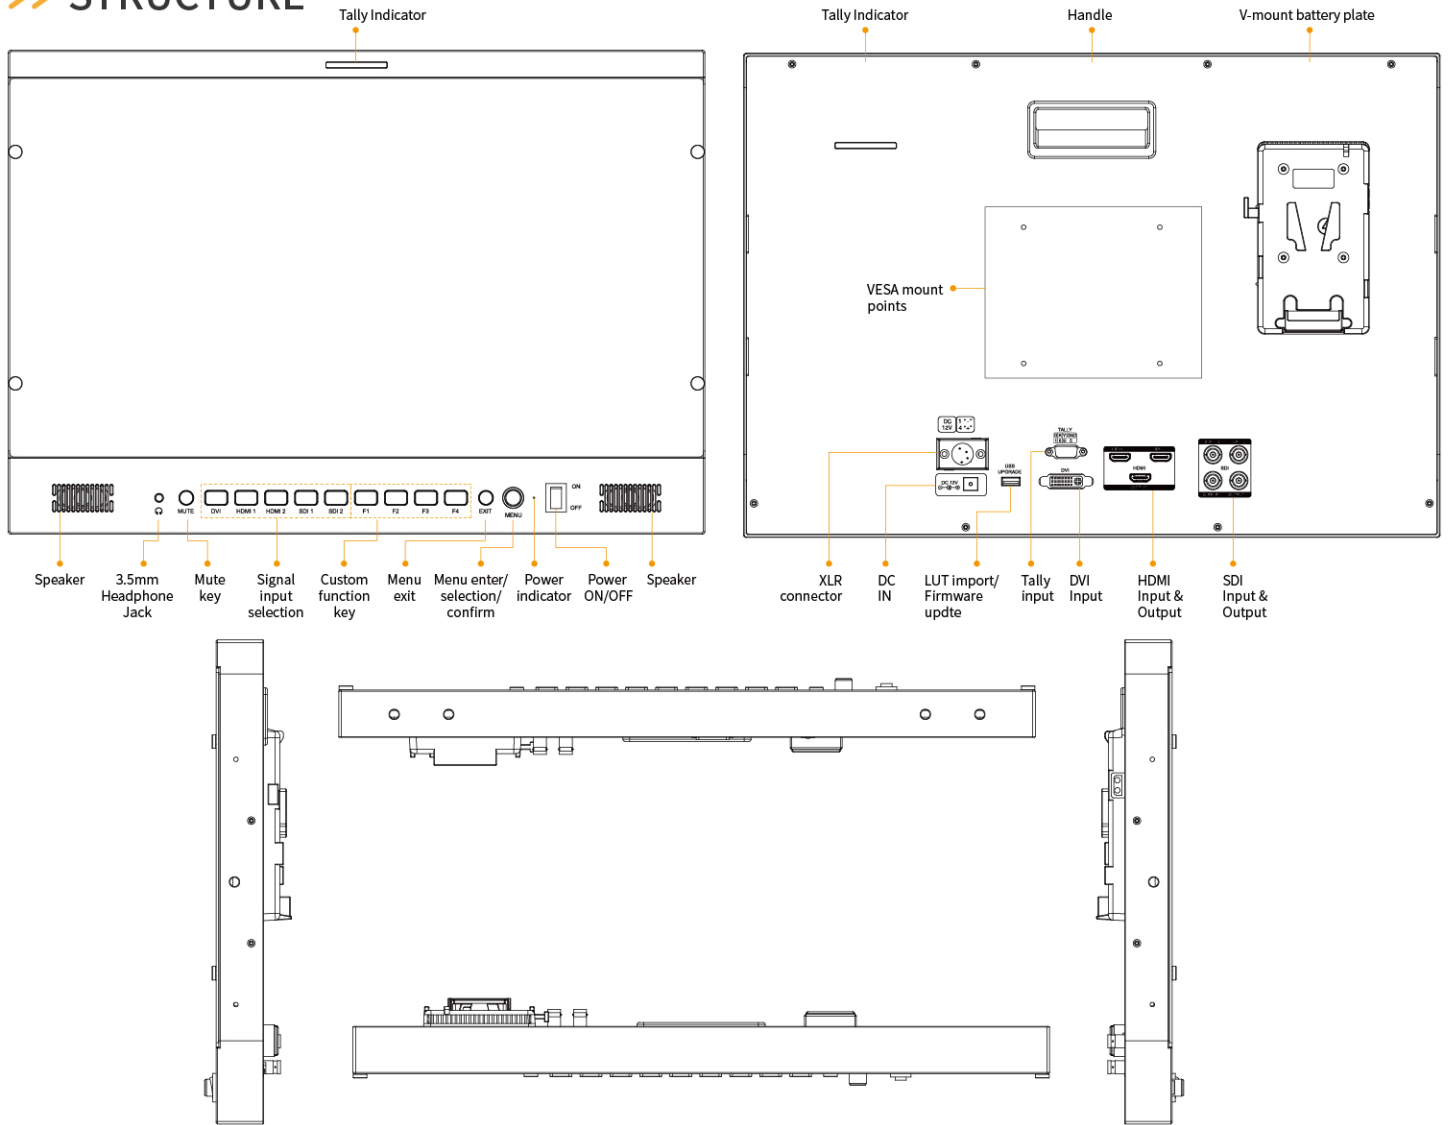



>> PARAMETER

Description	21.5" High Bright Portable Carry-on Monitor
Model	P215 PRO-CO
Screen size	21.5" IPS
Resolution	1920 × 1080 pixels
Display Colors	16.7M colors 8bit (6-bit + A-FRC)
Gamut	72% NTSC
Pixel pitch	0.08265(H) X 0.24795 (V) mm
Aspect Ratio	16:9
Brightness	1000 cd/m ²
Contrast	1000:1
Backlight	LED
Response Time	Tr + Tf=25ms
Viewing Angle	89°/89°(L/R) 89°/89°(U/D)
Inputs	2*3G-SDI, 2*HDMI2.0, DVI, Tally, USB
Outputs	2*3G-SDI, 1*HDMI2.0
Audio	3.5mm Stereo Headphone, Speaker
SDI Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
HDMI 2.0 Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K 3840 × 2160p (60/50/30/29.97/25/24/23.98Hz)
	4096 × 2160p (60/50/30/29.97/25/24/23.98Hz)
Input Voltage	DC 10-24V
Power Consumption	≤44W
Working Temperature	0°C~50°C
Storage Temperature	-20°C~60°C
Unit Size	553.5L × 394.5H × 115Dmm (with protectvie case)
Unit Weight	9.25KG (with protectvie case)

>> STRUCTURE



>> PACKING LIST

 <p>Monitor</p>	 <p>Power Adapter</p>	 <p>Tally Kit</p>	 <p>V-mount Battery Plate (default to mount on device)</p>
 <p>Mini HDMI Cable</p>	 <p>HDMI Cable</p>	 <p>SDI Cable</p>	 <p>Manual</p>



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@seetec.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn